

Flexi 700 LED Strip Light 2700K+6000K


General description

Ultra high density, 700leds/m
 Linear emitting performance, no dots without diffuser
 Smallest size of led, high reliability, excellent anti-bending ability
 Ta: -25~40°C ; Tc : 75°C (max)
 3 years warranty



Dimensions

Max.length : 5000mm(16.4')
 Cutting unit : 20mm/14leds
 LED pitch : 2.85mm(0.11")
 Min. bend diameter : Φ 60mm(2.36inch)
 Mounting : 3M tape
 IP : IP33/IP55/IP65/IP67


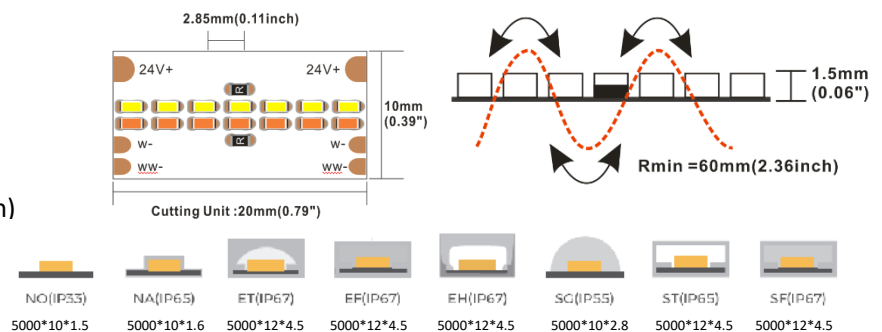


Electronic & output data


Input voltage : 24VDC
 Rated current : 0.73A/1m; 3.1A/5m
 Typical Power : 17.5W/1m(5.34W/FT); 74.4W/5m
 Power range: 15.9~19.2W
 Max.power: 19.2W(6.1W/FT)
 CRI : >90
 On-off times : 10000 (test times)
 Copper foil : 2oz

| Color | SW | W | SWW | | |
|-------------------------|-------|-------|-------------|--|--|
| CCT | 2700K | 6000K | 2700K+6000K | | |
| Lumen | 710 | 748 | 1458 | | |
| Lm/W | 81 | 85 | 83 | | |
| Energy efficiency class | A+ | A+ | A | | |

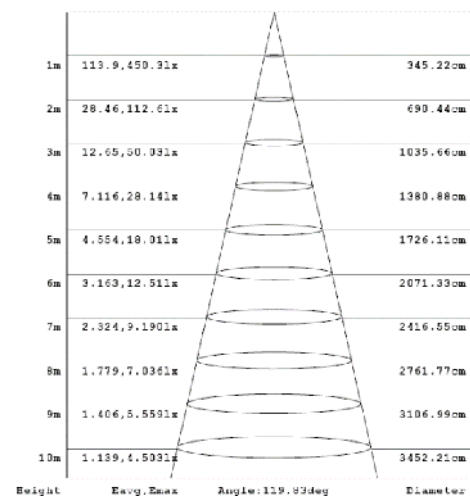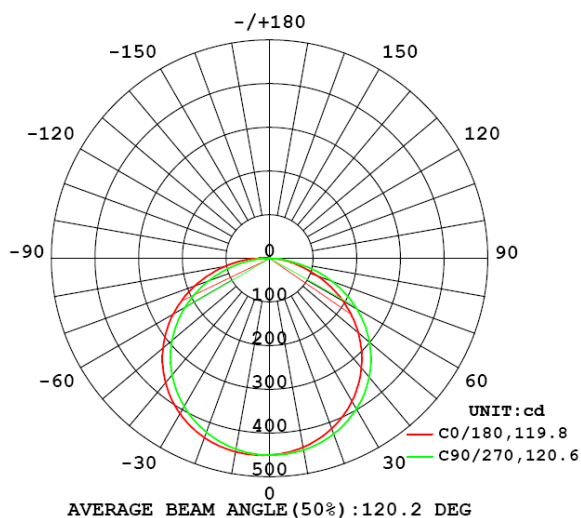

1.The tolerance of output data can be vary up to 10%
 2.the output data tested according to IES TM-30-15
 3.the output data is based on IP33/1merter
 4.IP protection process leads changes to size, CCT and luminous flux

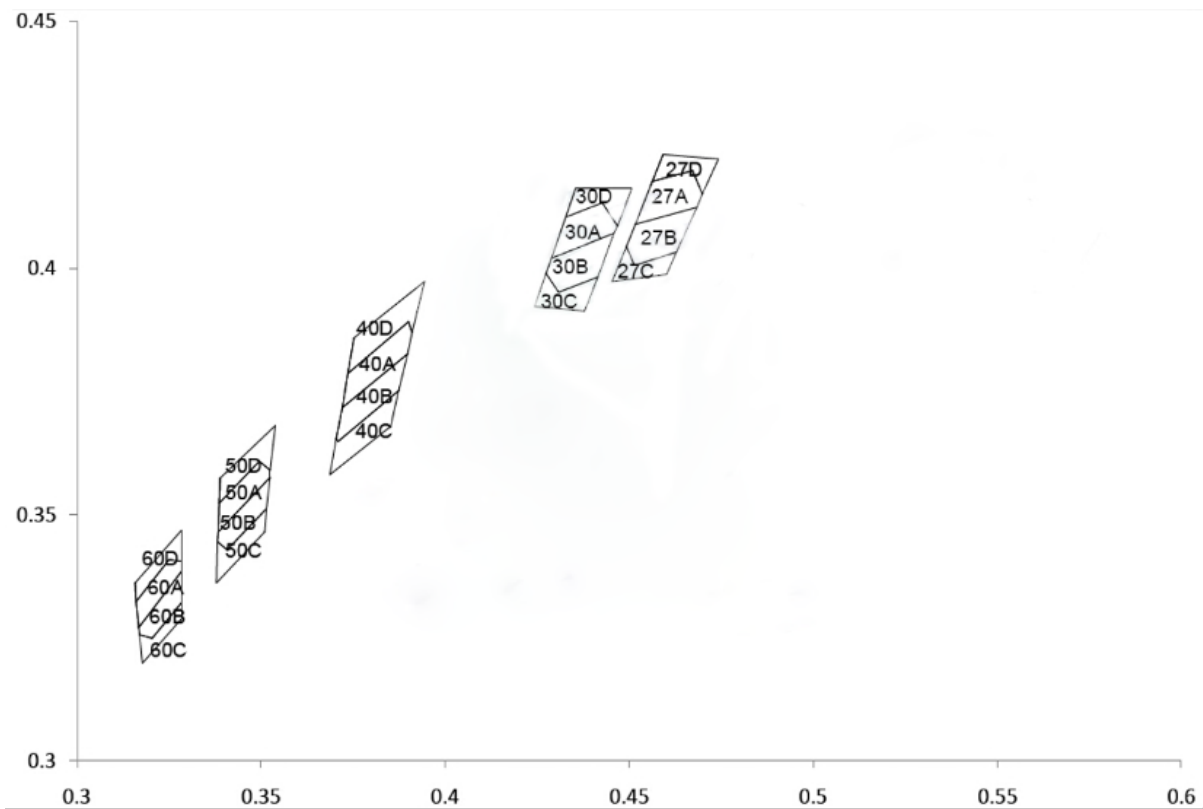

Flexi 700 LED Strip Light 2700K+6000K



Accessories Information

| Type | Name | Picture | Code | Color | protection technique | Remark |
|-------------|------------------|---|----------------|-------------|----------------------|--------|
| Tube clamps | 10mm Tube clamps |  | 94.19.01100003 | transparent | SG | |
| | 10mm Tube clamps |  | 94.19.01100004 | transparent | NO/NA | - |

