





greenlux
cost reduction LED lighting

Altitude **Gimbal** LED Downlight

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours



 125mm



 155mm



Specifications

Colour Range	3000K/4000K/5000K
Power Consumption	20W & 30W
Luminous Flux	1800lm & 2400lm
Input Voltage	100V ~ 240V AC
Power Factor	>0.9
Chipset	Citizen COB
CRI	>85
Beam angle	60° / 70°
IP Rating	IP 44
Dimmable	Triac / 0-10V / Dali (options)
Housing Material	Aluminum + Powder Coating
Housing Colour	White / Black



Dimensions



Product Dimensions (mm)	20W	Ø140 * 88
	30W	Ø170 * 95
Cutout (mm)	20W	125
	30W	155





greenlux
cost reduction LED lighting

Altitude **Gimbal** LED Downlight

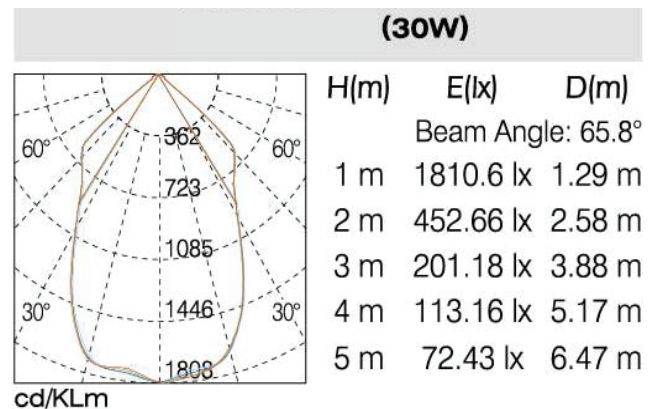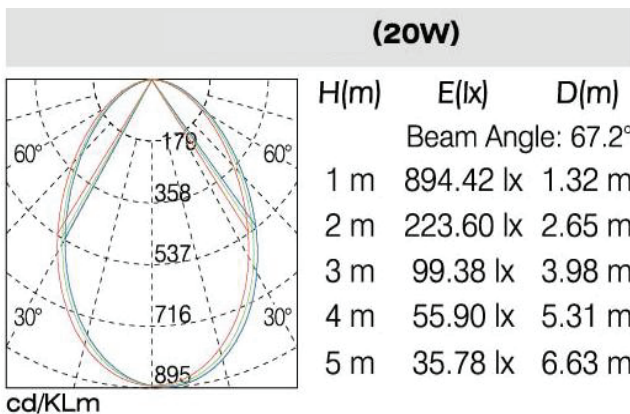

Model#	CCT	LED Type	Lumen(lm)	Dimension (mm)	Cutout Size (mm)	Dimmable	Voltage(V)
GDALT-20W-G 4"	3000K	COB	1800	Ø140*88	Ø125	Triac 0-10V Dali	AC 100-240V
GDALT-30W-G 5"	4000K 5000K						