



greenlux
cost reduction LED lighting

Rubix COB Series 01 LED Downlight

Available in 7W & 10W


80% lumen maintenance at 50,000 hours

- High CRI architectural design light
- Traic / 0-10V / Dali dimmable options
- No UV or IR rays. No mercury
- Replaces traditional recessed lights
- High quality Sharp COB Chipset
- High light output 85lm/W
- High quality Aluminum housing
- IP20 Rated
- 5 Years Warranty
- Applications includes cafes, restaurants, hotels, shops walkways, museums & display cases



Specifications

Colour Range	2700 ~ 6500k
Power Consumption	7W / 10W
Luminous Flux	595lm / 850lm
Input Voltage	100V/240V AC
Output Voltage	36V
Current	200mA / 250mA
Beam angle	21°
CRI	>90
Power Factor	>0.95
Chipset	Sharp COB
Driver	Class II

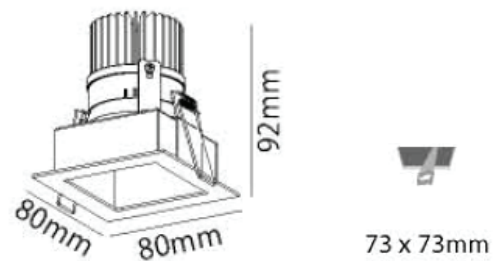

Dimensions & Materials

Product Dimensions (mm)	80 * 80 * 92
Cutout (mm)	73 * 73
Housing Material	Aluminum Alloy + Powder Coating
Housing Colour	White / Silver / Black

IES

LM80

RCM

SAA

IP20

TUV

CE

5 Yrs
Warranty






greenlux
cost reduction LED lighting

Rubix COB Series 01 LED Downlight

Available in 7W & 10W
80% lumen maintenance at 50,000 hours

Photometrics

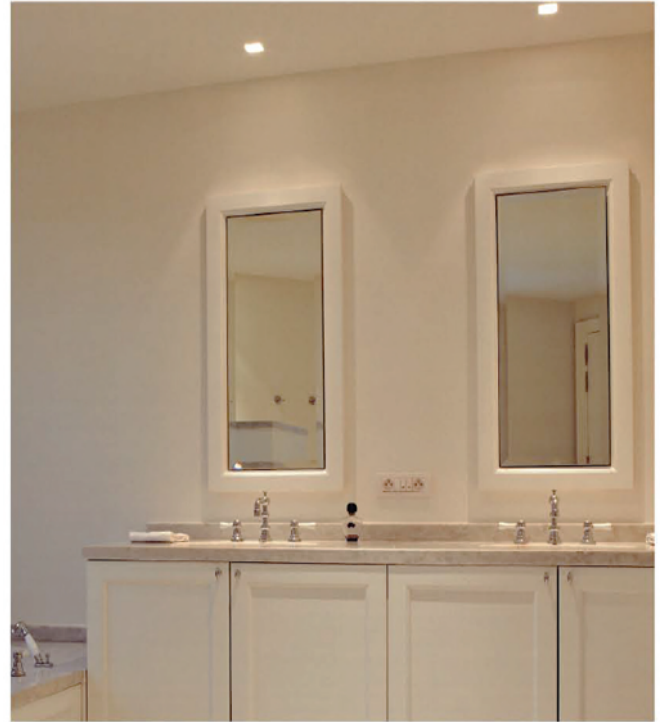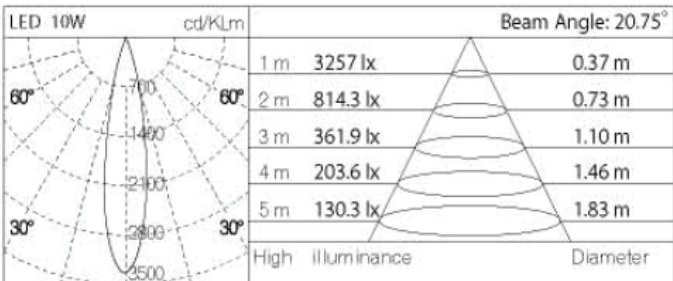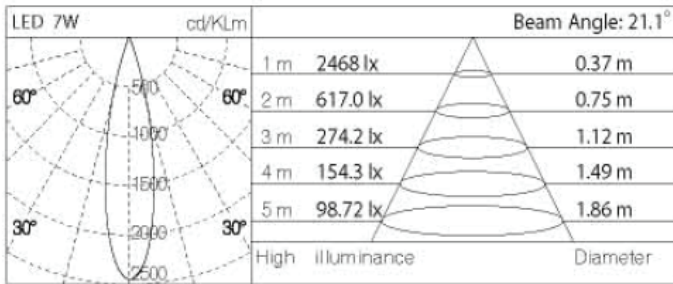

Model

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT	Lumens	Power	LED
GJRUB-7W-C01	80*80*92	73*73	21°	2700-6500k	595	7W	Sharp COB
GJRUB-10W-C01					800	10W	