





Recessed
LED Stair Light and Wall Light
Stainless steel front cover with Matte Surface



GKB1AAR0102


GKB1AAS0102

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics


- N/A

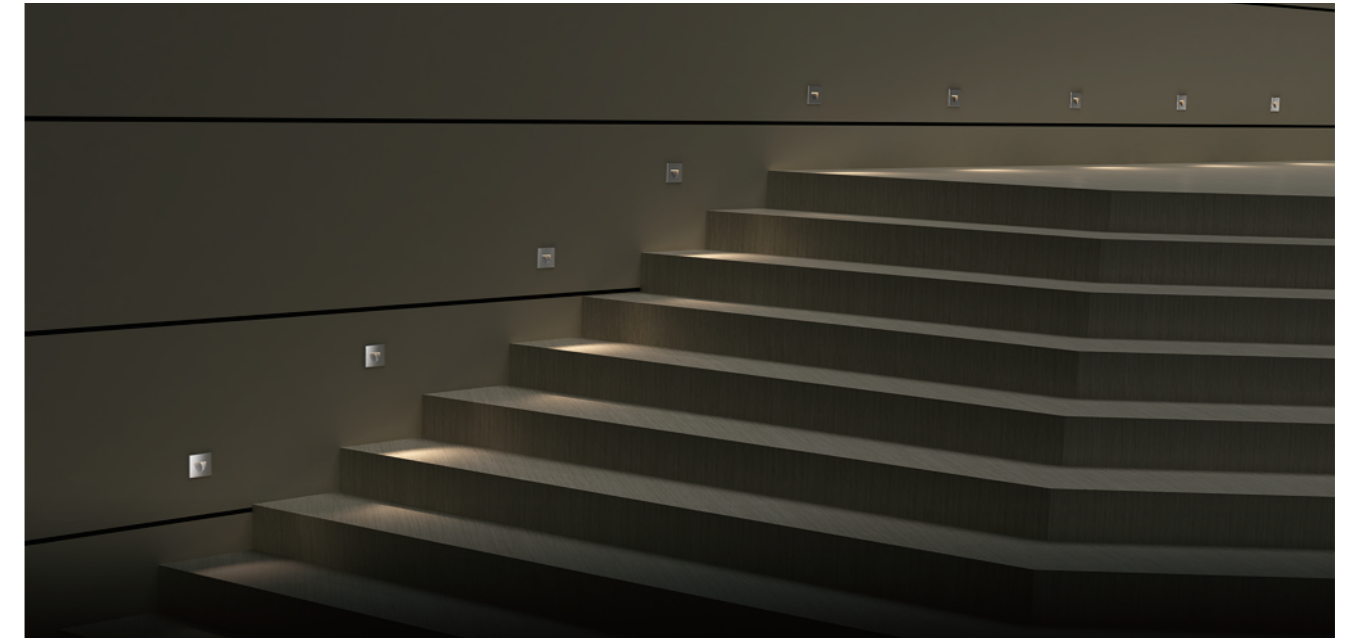


Material specifications

Housing	12 [#] Die-casting aluminum T=20-25 μ m. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
Front cover	Hard chrome-plated stainless steel SUS 316 [#]
Light Source	OSRAM
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20 $^{\circ}$ C~40 $^{\circ}$ C
Power Cable	H05RN-F 2X1.0mm ² L=0.3m (low voltage)
Mounting sleeve	ABS 100 [#]
Dimmable Support	Triac PWM 1-10V Dali


Outer Dimensions

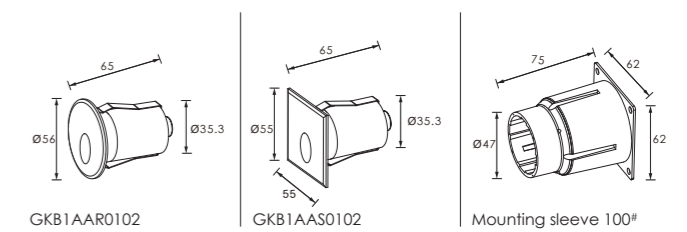

Lighting Effect demo & Installation

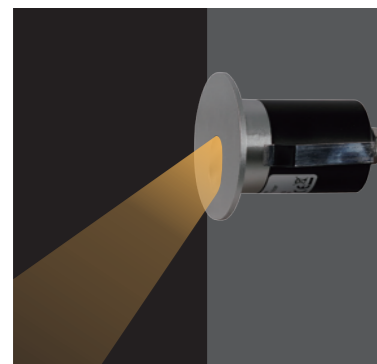

Wall recessed

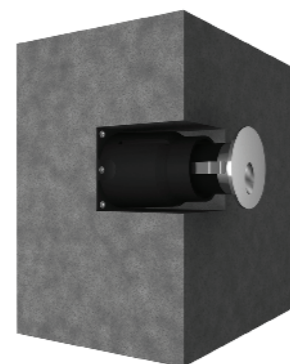

Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

Item	Light source	Lens	The manufacturer selected lens degree($^{\circ}$) θ 1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKB1AAR0102	1 \times 2W	L0180C010AR	50 $^{\circ}$	24V DC	100	2.4	Cool white =40 Warm white =36	10
GKB1AAS0102	1 \times 2W	L0180C010AR	50 $^{\circ}$	24V DC	100	2.4	Cool white =40 Warm white =36	10

