



Giza GA0334



Recessed LED Stair Light and Wall Light

LED Colour Temperature Optics

- 2000K
- 3000K
- 6000K
- N/A




GKD1GA0334

GKD1GB0334

Outer Dimensions

Unit:mm

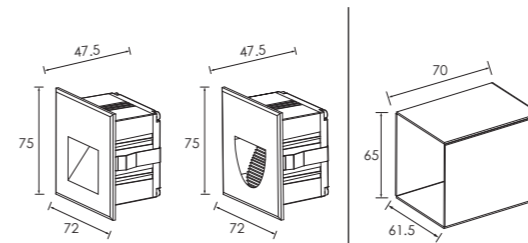

GKD1GA0334

GKD1GB0334

Mounting sleeve 139#




Material specifications

Housing	12# Die-casting aluminum T=20-25µm. Adhesion of ISO class1/ ASTM class 4B high temperature painting
Light Source	SMD3030 Type LED
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	139# Zinc plated mounting sleeve grey powder Coated, T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Dimmable Support	Triac PWM 1-10V Dali

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKD1GA0334	3×0.7W	24V DC 120/240	24V = 110	24V = 2.6	Cool white =26 Warm white =24	10
			120V = 48	120V = 3.1		
			240V = 28	240V = 3.1		
GKD1GB0334	3×0.7W	24V DC 120/240	24V = 110	24V = 2.6	Cool white =25 Warm white =22	10
			120V = 48	120V = 3.0		
			240V = 28	240V = 3.1		

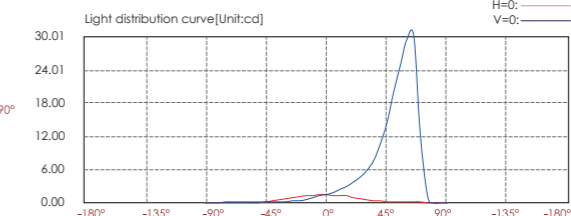

Center beam LUX	Beam width V	Beam width H
2m 0.36 LUX	1.4m	0.8m
4m 0.09 LUX	2.7m	1.7m
6m 0.04 LUX	4.1m	2.5m
8m 0.02 LUX	5.5m	3.4m
10m 0.01 LUX	6.8m	4.3m
12m 0.01 LUX	8.2m	5.1m

Ver.Spread:37.7 Horiz.Spread:23.9