


Giza QR0102



Asymmetrical
Recessed LED Stair Light and Wall Light



GKB1QR0102



GKB1QS0102

LED Colour Temperature


- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions

Unit:mm

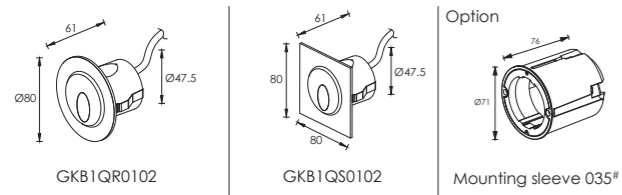


Material specifications

Housing	12# Die-casting aluminum T=20-25μm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
Light Source	OSRAM
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.3m(low voltage) H05RN-F 3X1.0mm ² L=0.3m(high voltage)
Mounting sleeve	ABS 035#
Dimmable Support	Triac PWM 1-10V Dali

Front Cover Color Option

Sanded Brown RAL8019	Powder painting RAL9006	Sanded Black RAL9005

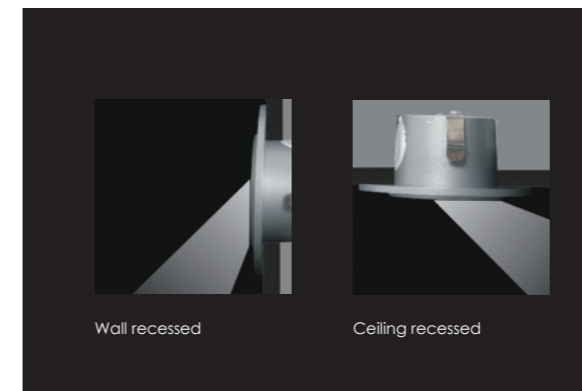

Lighting Effect demo



Installation with clips embedded into sleeve, fix on the concrete wall

Installation with clips directly

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ GKB1QR0102	1×3W	L0180C010AR	80°	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.0 240V = 3.1	Cool white=64.7 Warm white=60.0	10
□ GKB1QS0102	1×3W	L0180C010AR	80°	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.0 240V = 3.1	Cool white=64.7 Warm white=60.0	10

