

Giza U0102



Recessed LED Wall Recessed Outline Light

LED Colour Temperature

- 2000K
- 3000K
- 6000K


Optics

- N/A



Outer Dimensions


Unit:mm

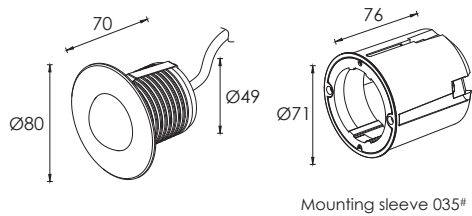



Material specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front ring	Hard chrome-plated Staines steel SUS 316#
Lens	Optical Glass
Operating temperature	-20°C~40°C
Waterproof seal	Rubber seal
Mounting sleeve	ABS 035#
Dimmable Support	Triac PWM 1-10V Dali

Mounting sleeve characteristic



Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKD1UA0102	1×3W	L0145F042KP	45°	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3.0	Cool white =31 Warm white =27	09

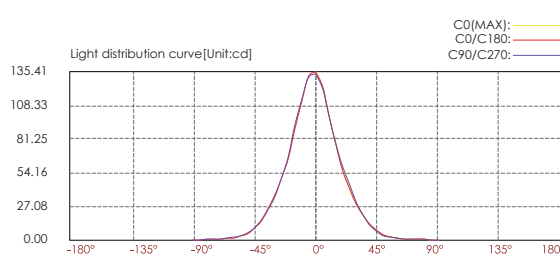

Distance (m)	Center beam LUX	Beam width (V x H)
2m	33.85 LUX	1.4m x 1.3m
4m	8.46 LUX	2.7m x 2.7m
6m	3.76 LUX	4.1m x 4.0m
8m	2.12 LUX	5.5m x 5.3m
10m	1.35 LUX	6.9m x 6.7m
12m	0.94 LUX	8.2m x 8.0m