

Giza X Series




Recessed
LED Stair Light & Wall Light



GKB1XQ0156

GKB1XT0157

GKR1XU0125

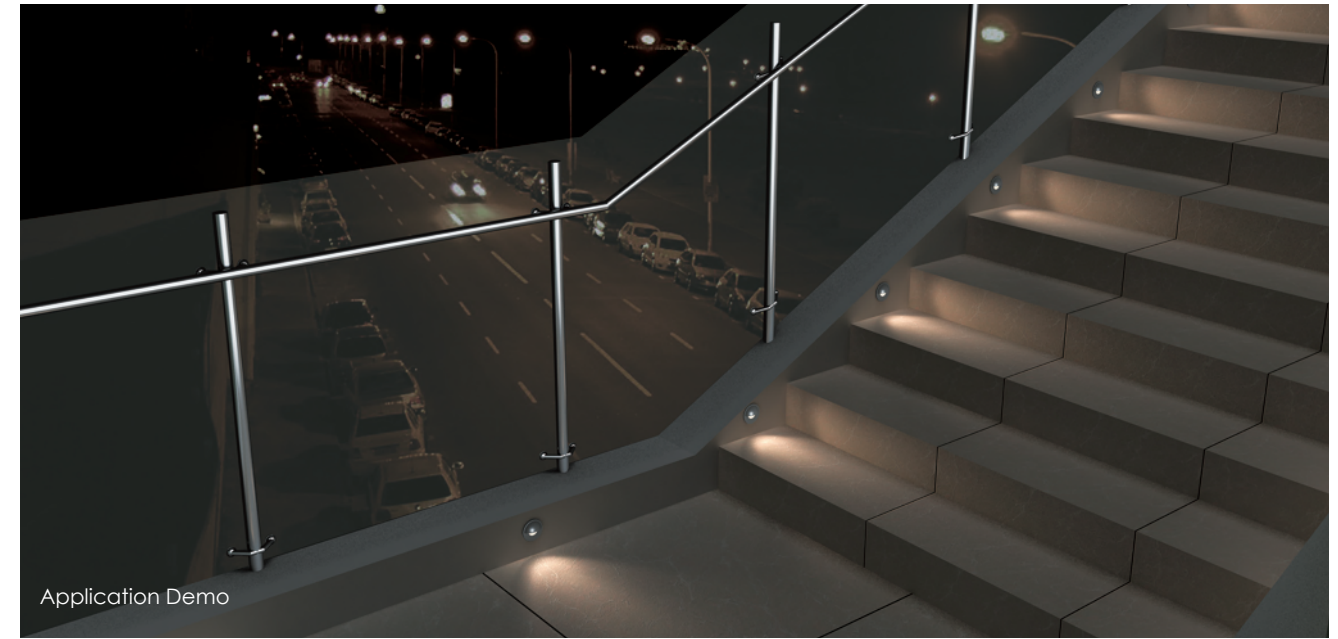

Application Demo




LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- R7
- R0124C035XL 24°
- B44
- L0120D023RT 20°
- B34D
- L0122F023YH 22°

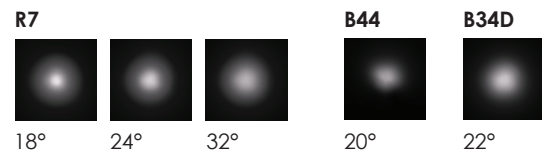


18° 24° 32° 20° 22°

Material specifications

Housing&Front cover	12 * Die-casting dark grey powder coated aluminum.T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	Step tempered clear glass.T=4mm
Loading capacity	>2000kg
Cable gland	IP67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m(low voltage) H05RN-F 3X1.0mm ² L=0.5m(High voltage)
Mounting sleeve	ABS 033° 062° 065°
Dimmable Support	Triac PWM 1-10V Dali


Outer Dimensions

Unit:mm

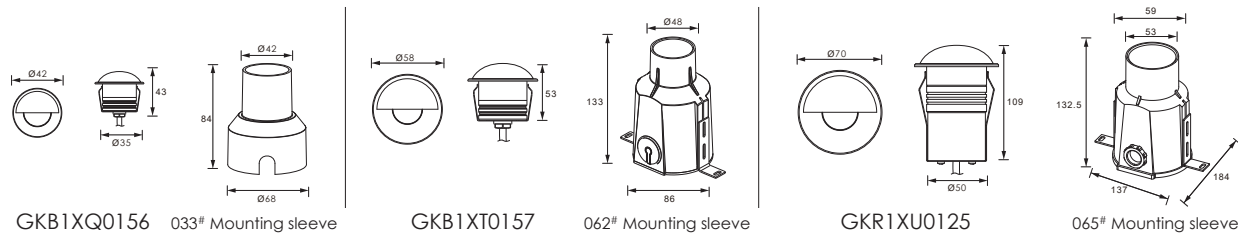


Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKB1XQ0156	1×1W	B44	40°	24V DC	54	1.3	Cool white =28 Warm white =23	10
GKB1XT0157	1×2W	B34D	22°	24V DC	108	2.6	Cool white =60 Warm white =51	10
GKR1XU0125	1× 5W COB	R7	24°	24V DC 120/240	24V = 265 120V = 52 240V = 32	24V = 6.3 120V = 6.0 240V = 6.0	Cool white =237 Warm white =208	10

GKB1XQ0156

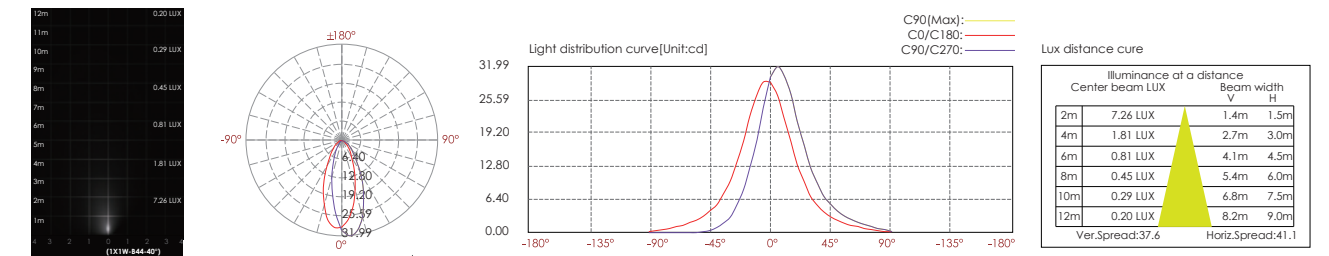

GKB1XT0157

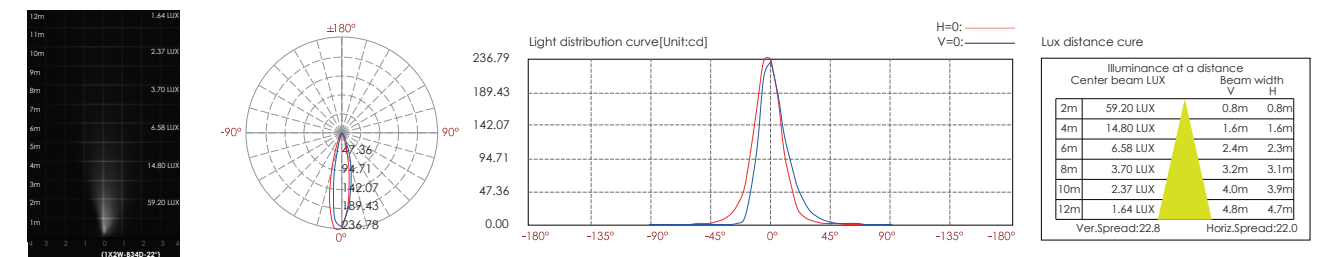

GKR1XU0125

