





Lenson Series 03 Outdoor LED Wall Light

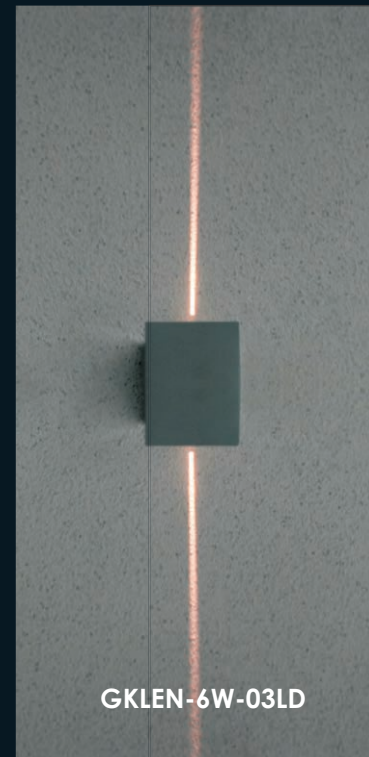

S

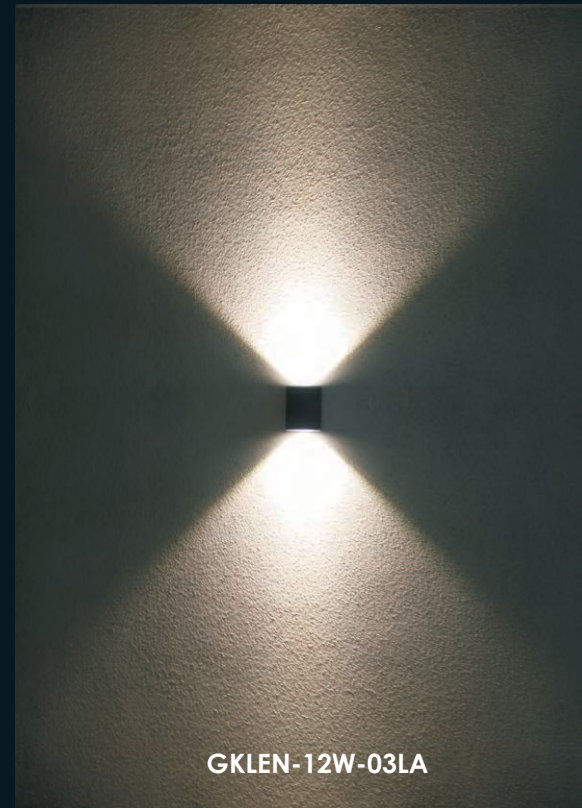

L

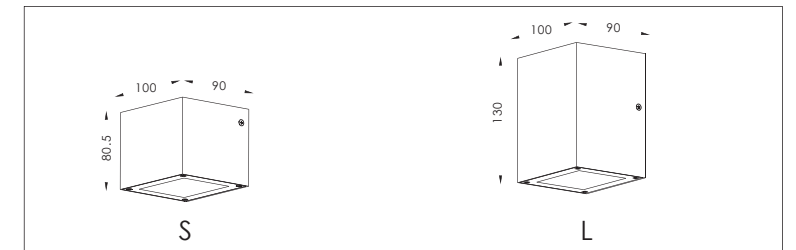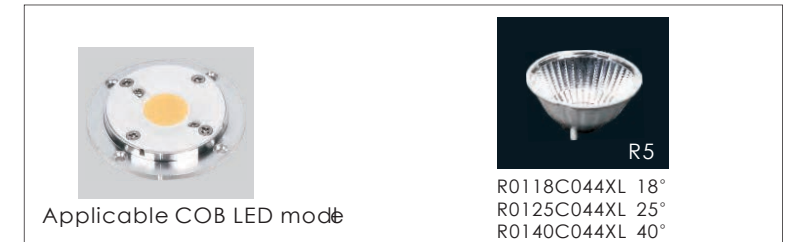

Material specifications

Housing	12" Die-casting luminum with Painting T=60-80um Adhesion of ISO class 1/ASTM class 4B
Cover	PC T=6mm
Gasket	Tooling shaped sral
Driver	Main voltage 100V-240V driver inside builded
Operating temperature	-20° C~40° C
Power cable	H05RN-F 3X1.0mm L=0.5m(high voltage)

Item No.	Light source	Reflector	Lens degree selected by manufacturer (p 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
GKLEN-3W-03SB	1×3W OSRAM Sguare	—	—	24VDC 120/240	120V=40 240V=28	120V=4.2 240V=4.4	155	06
GKLEN-6W-03LB	2×3W OSRAM Sguare	—	—	24VDC 120/240	120V=77 240V=56	120V=8.6 240V=8.8	2x155	06
GKLEN-6W-03LC	2×3W OSRAM Sguare	—	—	24VDC 120/240	120V=77 240V=56	120V=8.6 240V=8.8	—	06
GKLEN-6W-03LD	2×3W OSRAM Sguare	—	—	120/240	120V=77 240V=56	120V=8.6 240V=8.8	—	06
GKLEN-12W-03LA	2×6W BRIDGELUX COB	R5	25	24VDC 120/240	34V= 120V=220 240V=120	24V=13 120V=15 240V=15	Cool white=2x598 Warm white=2x517	06
GKLEN-6W-03SA	1×6W BRIDGELUX COB	R5	25	24VDC 120/240	27V= 120V=110 240V=60	24V=6.5 120V=7.6 240V=7.6	Cool white=598 Warm white=517	06