


Bright Circle A Series



- Ceiling Mounted, Suspended, Suspended Rod.
- White / Black Housing Colour Options
- Application: offices, hotels, households, public area, hallway etc.
- Warranty: Residential 3 Yrs / Commercial 5 Yrs

Bright Circle A Series

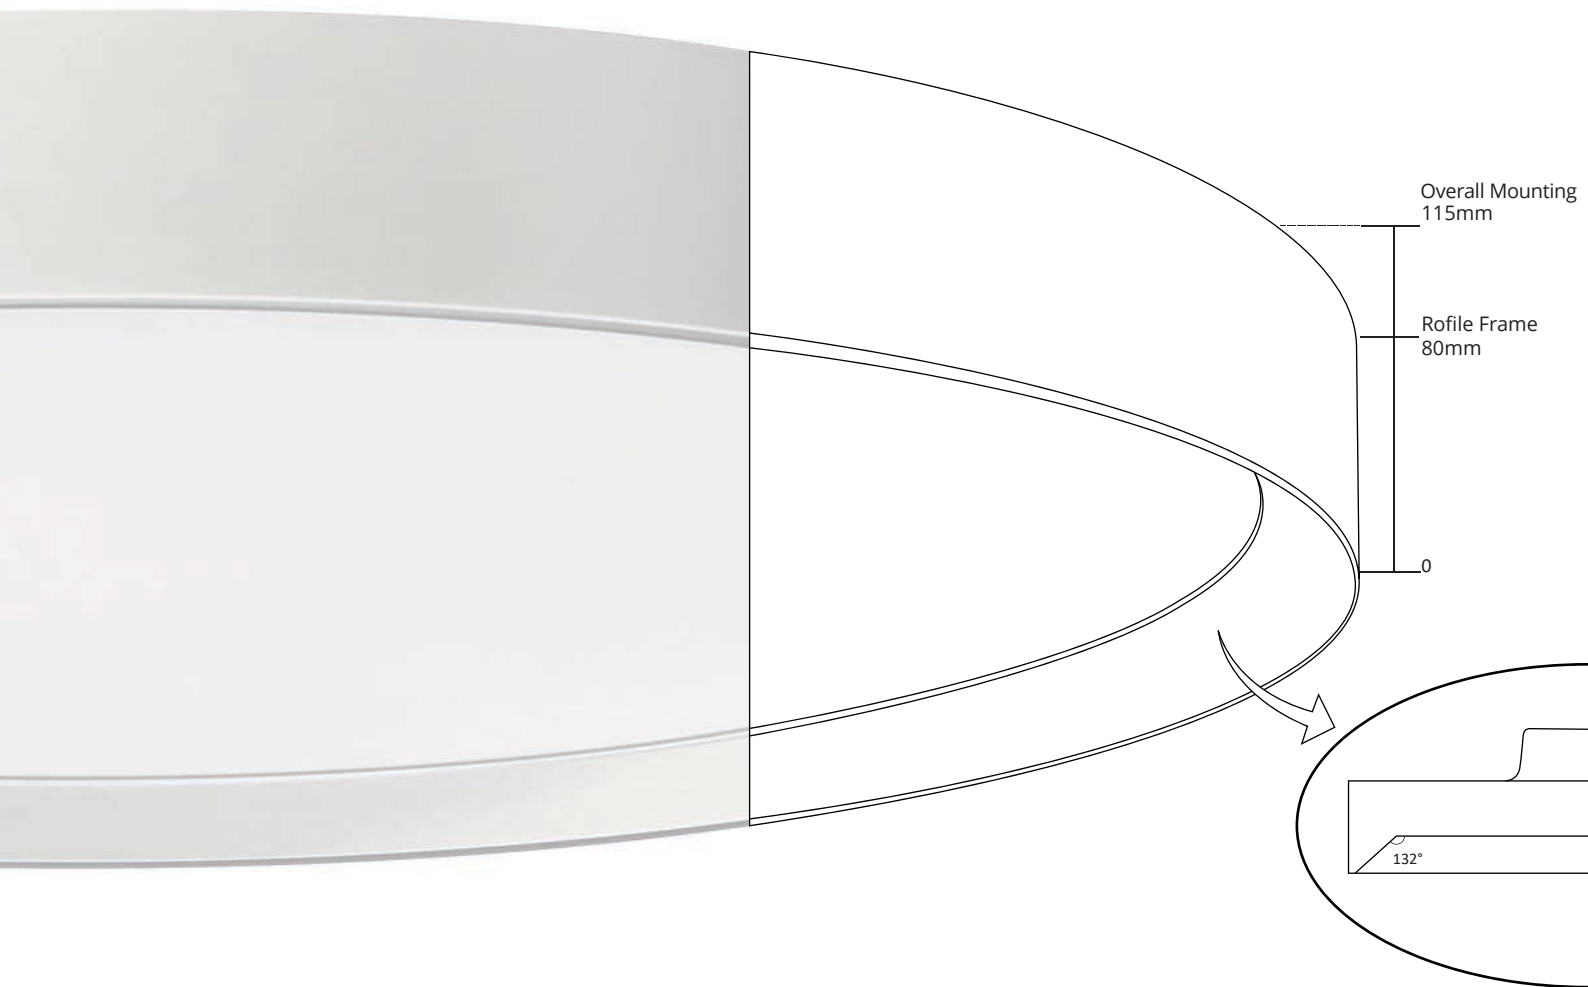

SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.



Bright Circle A Series

- Wide range of options available for different projects.
- Opal cover / Microprismatic variant glare-free office lighting.
- Direct lighting / indirect lighting.
- Sizes: 300mm / 435mm / 585mm / 735mm / 875mm / 1150mm.

	ø 300mm	ø 450mm	ø 600mm	ø 750mm	ø 900mm	ø 1200mm
MOUNTING						
Wall	•	•	•			
Ceiling	•	•	•	•	•	•
Suspended Cable		•	•	•	•	•
Suspended Rod		•	•			



Bright Circle A Series

Suspended

Specification

GENERAL

Suspended

IP20

LED

Up to 120lm/w

2700 - 6500K

CRI >80 / 90

SDCM ≤3

ESTIMATED LED LIFETIME

L90 / 50,000h

OPTICAL

Direct / Indirect Illumination

PS Cover Opal

Microprismatic (Low UGR)

Beam Angle: 110°

ELECTRICAL

Non Dimable / DALI, 1-10V, TRAIC

PF >0.9

PHYSICAL

Aluminium

Powder-coated


HOUSING COLOUR

Black

White

COLOUR TEMPERATURE

2700 - 6500K Options



Microprismatic (Low UGR)



Direct / Indirect Light Distribution

Bright Circle A Series

Suspended

GHBRI-435-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm



φ435mm

GHBRI-875-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115mm
90W	2700-6500K	φ875*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115mm
90W	2700-6500K	φ875*115mm



φ875mm

GHBRI-585-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm



φ585mm

GHBRI-1150-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1195*115mm
100W	2700-6500K	φ1195*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1150*115mm
100W	2700-6500K	φ1150*115mm



φ1150mm

GHBRI-735-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115mm
70W	2700-6500K	φ735*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115mm
70W	2700-6500K	φ735*115mm




φ735mm


Bright Circle A Series

Product Range


SIZE

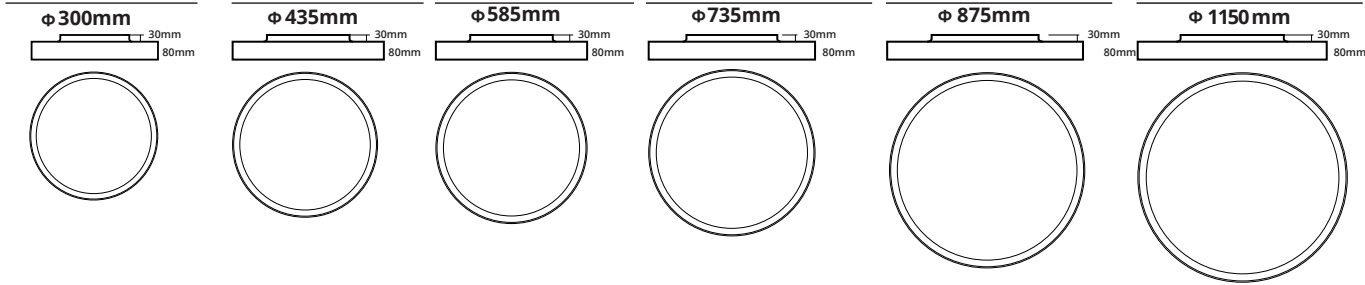

MOUNTING

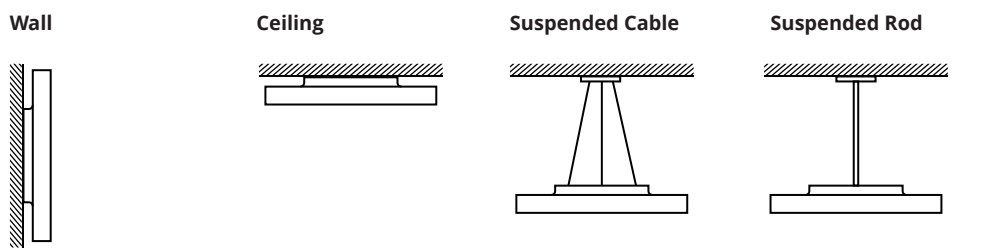

TYPE

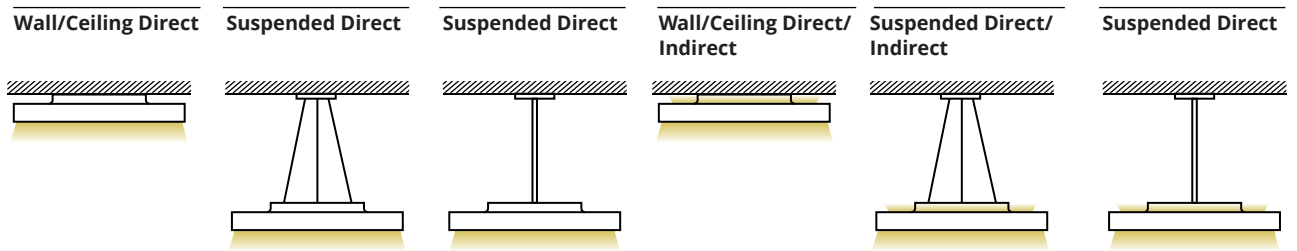

Bright Circle A Series

