


Bright Circle B Series




- Ceiling Mounted, Suspended, Suspended Rod.
- Colours: black / white.
- Application: lobby, hotel, office etc.
- Warranty: Residential 3 Yrs / Commercial 5 Yrs.

Bright Circle B Series

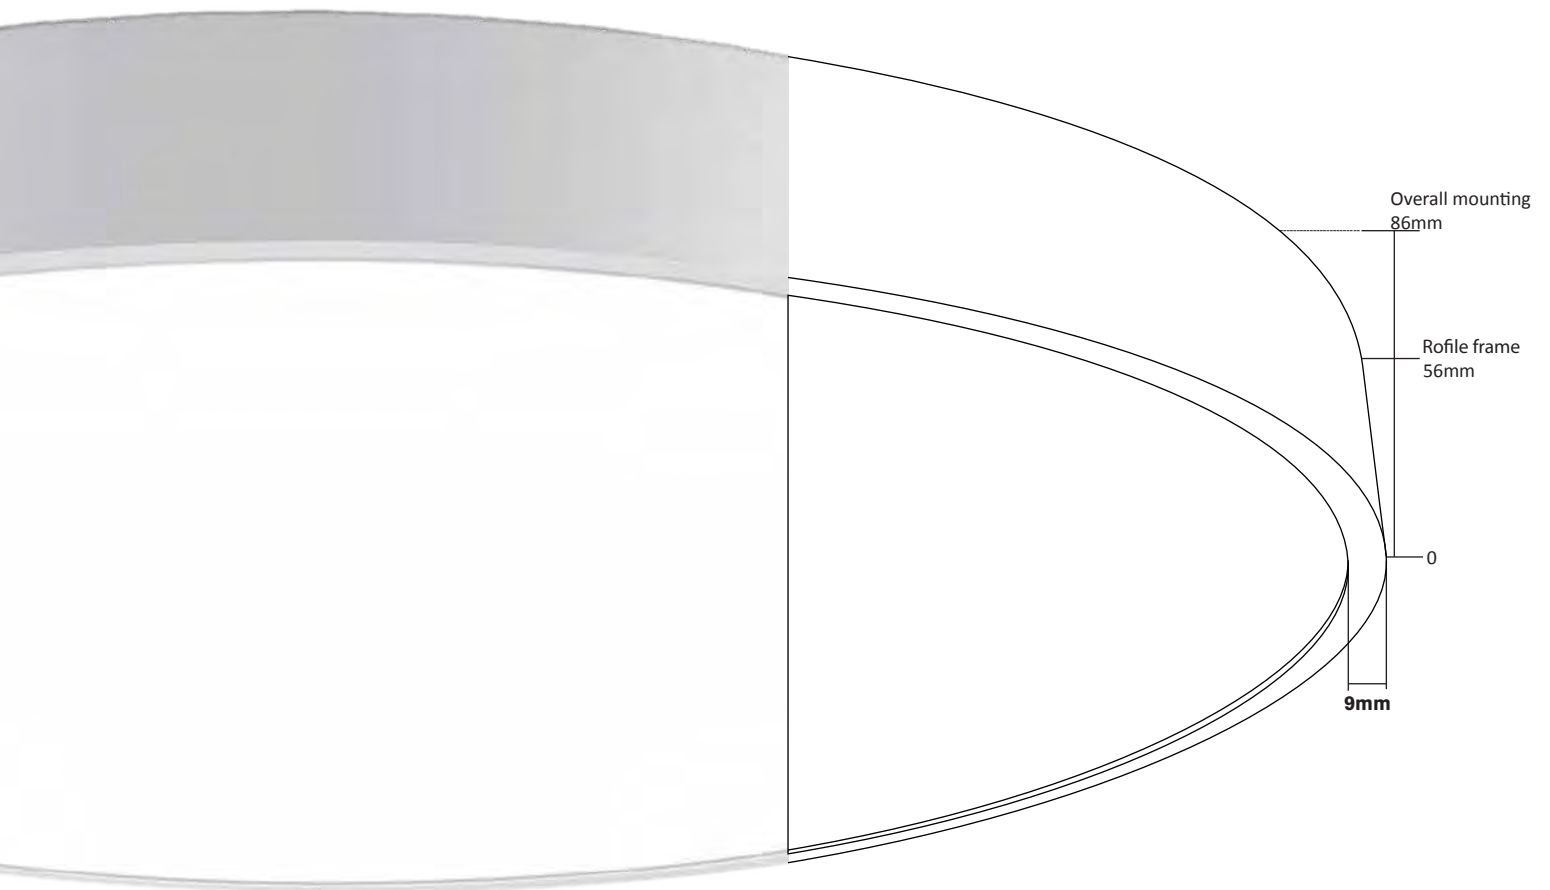

SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.

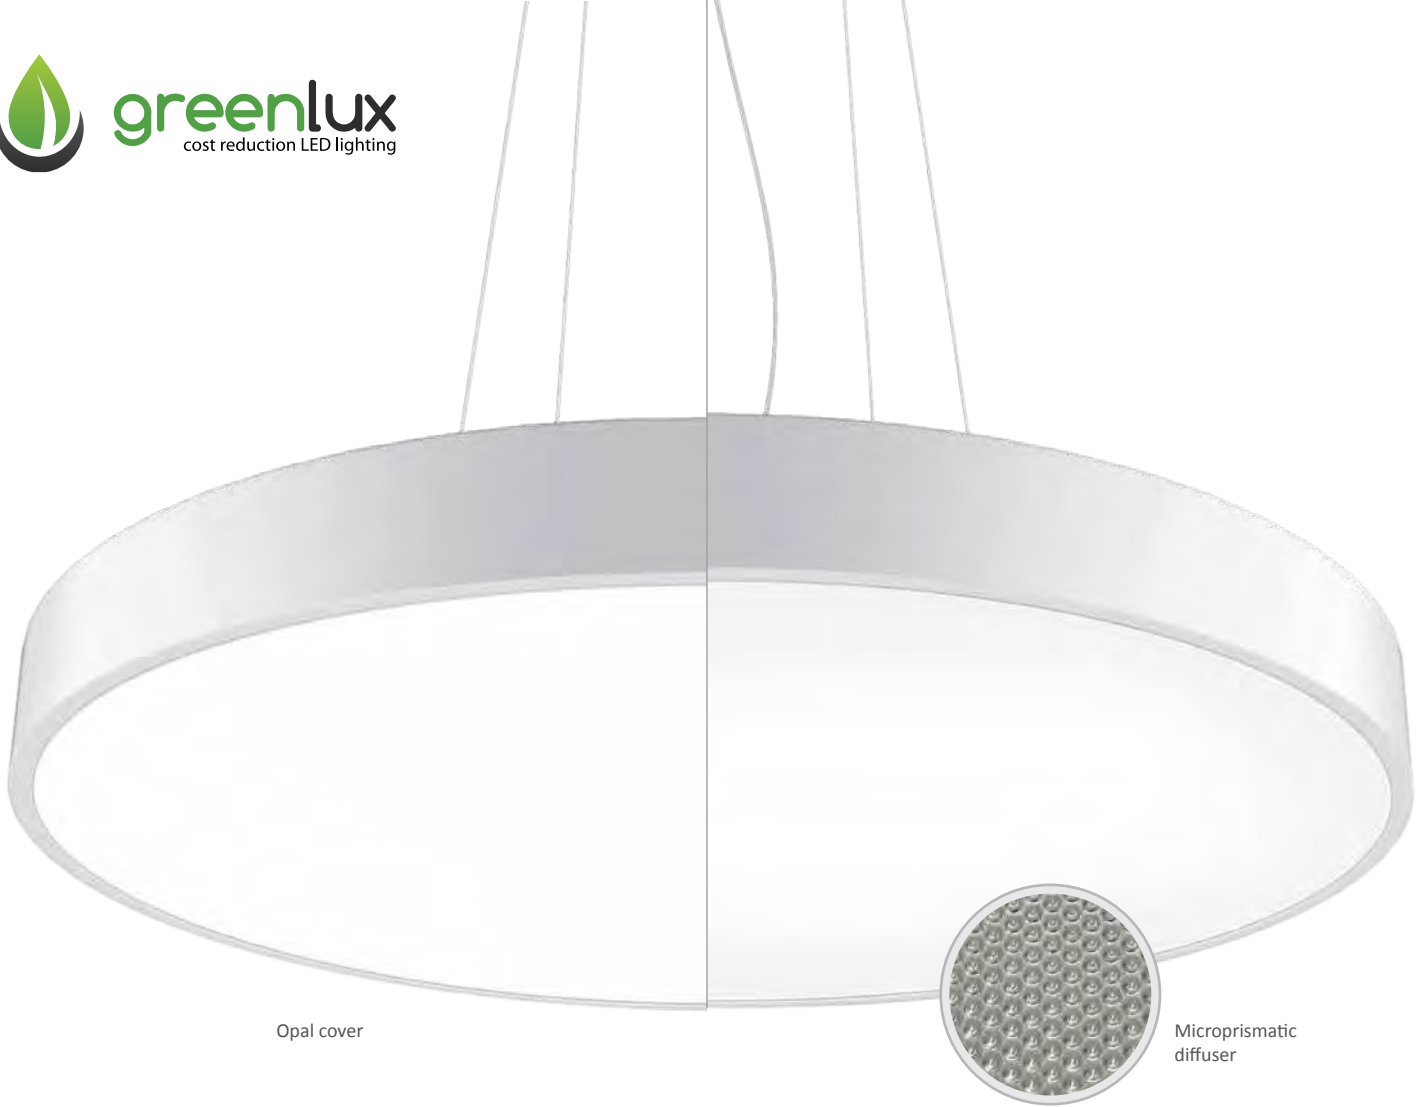

Bright Circle B Series

- Wide range of option available for different projects.
- Opal cover / Microprismatic variant glare-free office lighting.
- Direct lighting / indirect lighting.
- Sizes: 435mm / 585mm / 735mm / 875mm / 1195mm.

	ø 300 mm	ø 450 mm	ø 600 mm	ø 750 mm	ø 900 mm	ø 1200 mm
MOUNTING						
wall	•	•	•			
ceiling	•	•	•	•	•	•
suspended cable		•	•	•	•	•
suspended rod		•	•			



Bright Circle B Series

Suspended

Specification

GENERAL

suspended mounted

IP 20

LED

up to 120lm/w

2700-6500K

CRI >80Ra/90Ra

SDCM≤3

ESTIMATED LED LIFETIME

L90/50,000h

OPTICAL

direct,direct/indirect illumination

PS cover opal

microprismatic (LOW UGR)

beam angle (degree) : 110°

ELECTRICAL

non DIM, DIM DALI,DIM 1-10V, DIM TRAIC

PF>0.9

PHYSICAL

aluminium

powder-coated


MATERIAL COLOUR

black

white

COLOUR TEMPERATURE

2700-6500K optional



Microprismatic (LOW UGR)



Direct / Indirect Light Distribution

Bright Circle B Series

Suspended

GHBRI-435-CH-B

DIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

30W 2700-6500K 100LM/W

40W 2700-6500K 100LM/W


DIRECT/INDIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

30W 2700-6500K 100LM/W

40W 2700-6500K 100LM/W

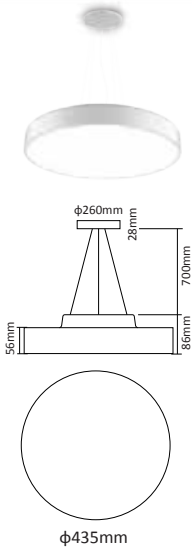

GHBRI-875-CH-B

DIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

70W 2700-6500K 100LM/W

90W 2700-6500K 100LM/W


DIRECT/INDIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

70W 2700-6500K 100LM/W

90W 2700-6500K 100LM/W

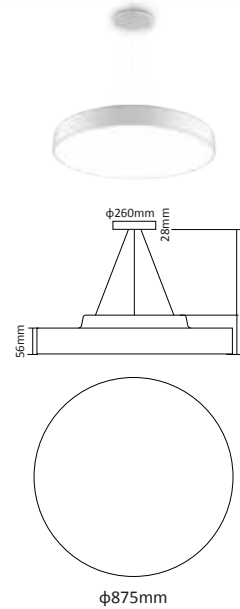

GHBRI-585-CH-B

DIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

40W 2700-6500K 100LM/W

60W 2700-6500K 100LM/W


DIRECT/INDIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

40W 2700-6500K 100LM/W

60W 2700-6500K 100LM/W

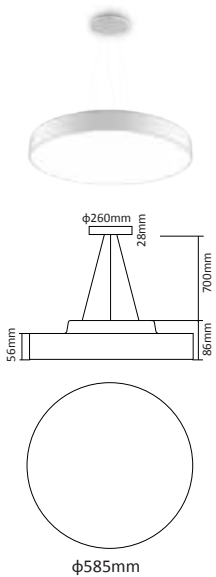

GHBRI-1195-CH-B

DIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

80W 2700-6500K 100LM/W

120W 2700-6500K 100LM/W


DIRECT/INDIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

80W 2700-6500K 100LM/W

120W 2700-6500K 100LM/W

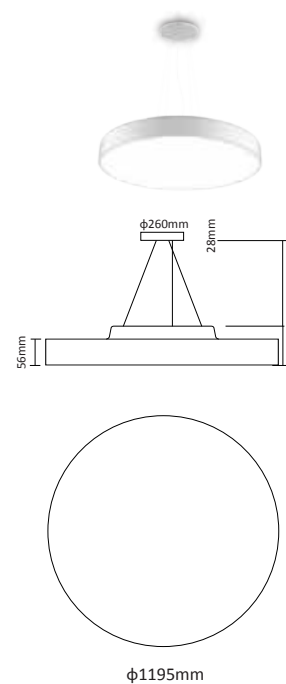

GHBRI-735-CH-B

DIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY

50W 2700-6500K 100LM/W

70W 2700-6500K 100LM/W


DIRECT/INDIRECT



SYSYTEM POWER CCT LOMINOUS EFFICACY


50W 2700-6500K 100LM/W

70W 2700-6500K 100LM/W

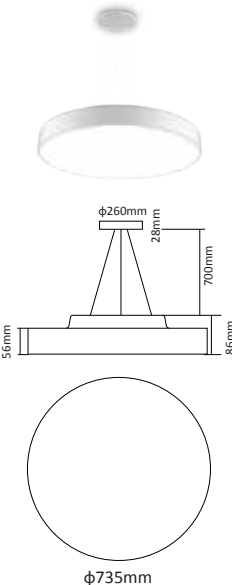

Bright Circle B Series

Product Range

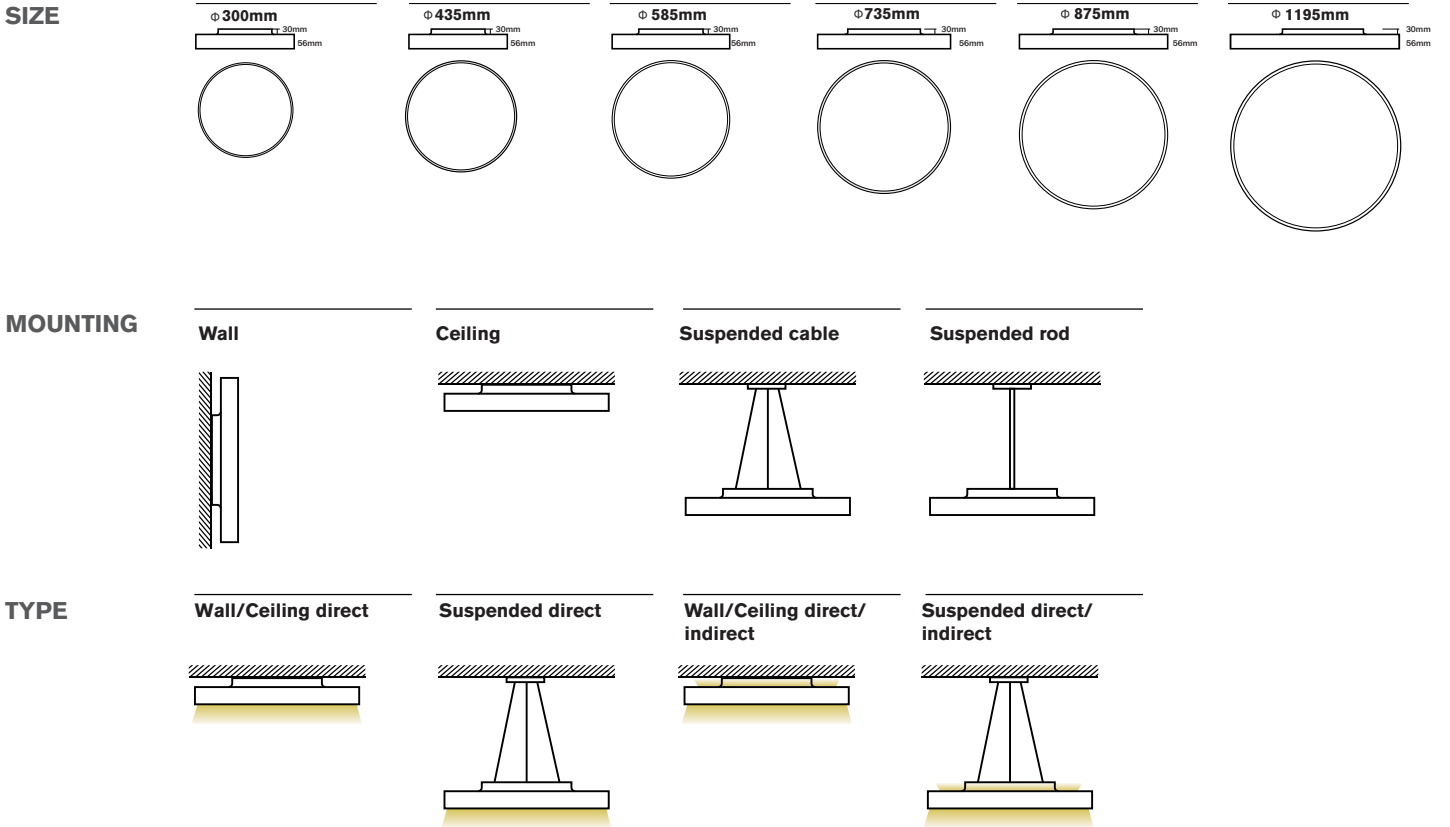

Bright Circle B Series

