

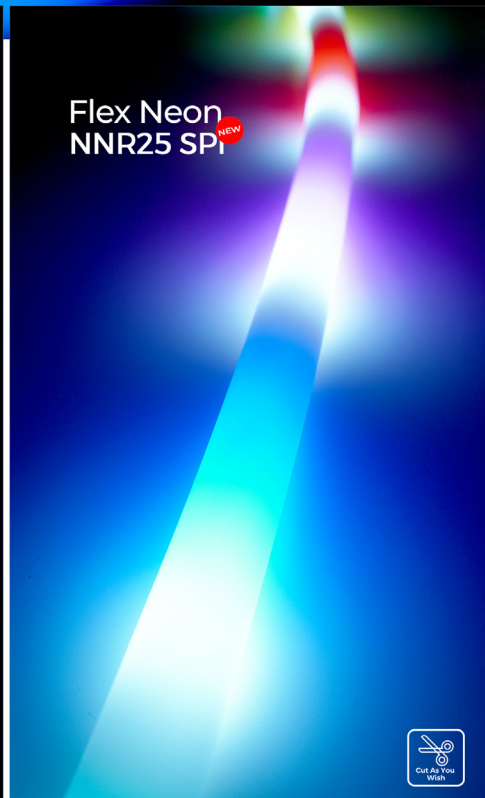
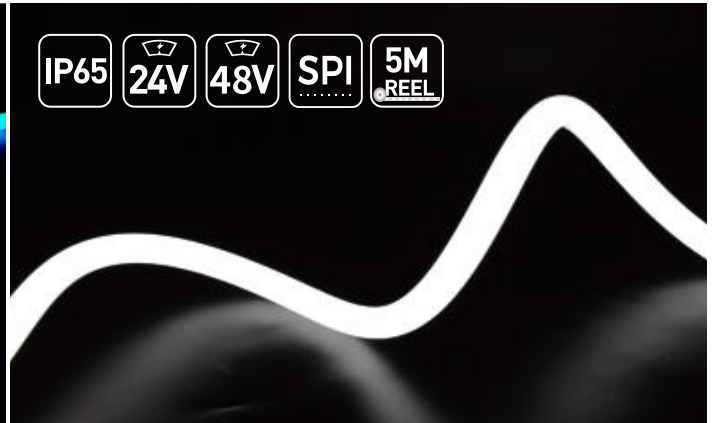
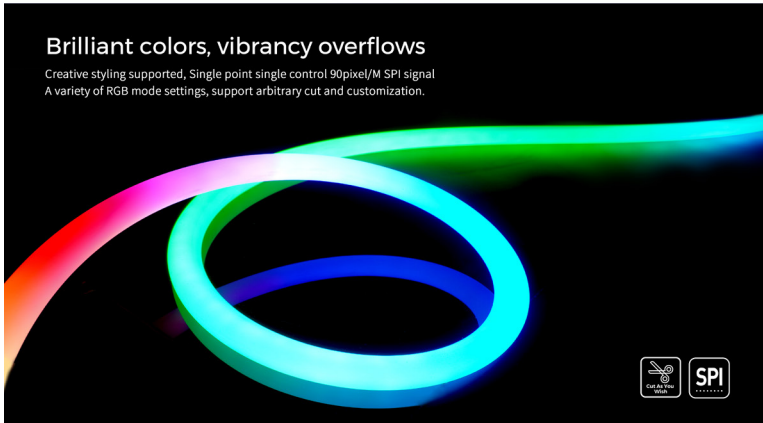


Flex Neon NNR25

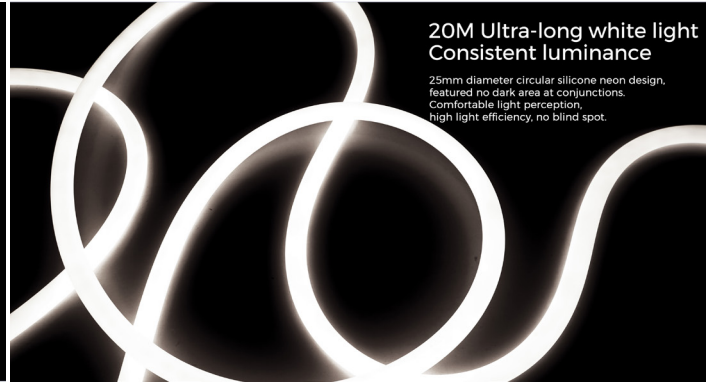



Flex Neon NNR25

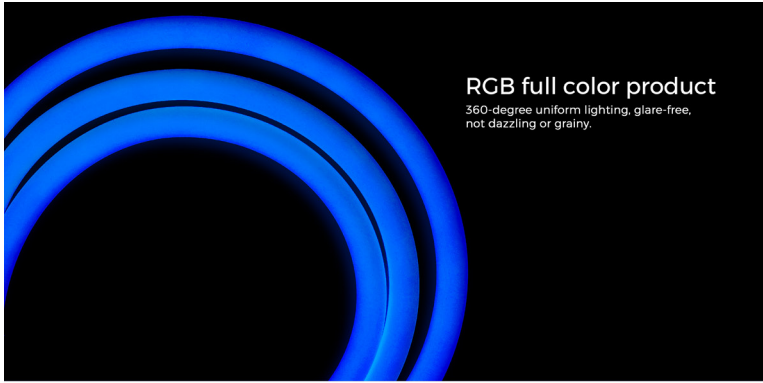


Product Parameter

Model	Size (mm)	Input voltage	Min cut(Leds/mm)	CCT/Color	Max.power (W/m)	Typ.power (W/m)	lumens(LM)	CRI	IP
Flex Neon NNR25	5000/φ25	24V	Freely cut	2300K 2700K 3000K 4000K	16	14.4	750/950/950/950	>90	IP65
NEW	20000/φ25	48V	83.33	2300K 2700K 3000K 4000K	13	12.5	810/880/950/980	/	IP65
	5000/φ25	24V	31.25	CCT	16	14.4	950	>90	IP65
	5000/φ25	24V	41.67	R G B	11	10	/	/	IP65
NEW	5000/φ25	24V	50	RGB	16	14.4	/	/	IP65
NEW	3000/φ25	12V	Freely cut	Flex	20	18	/	/	IP65

Light Distribution

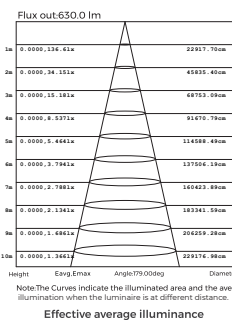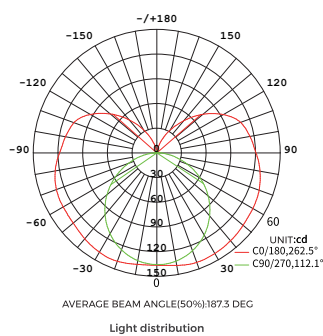

Flex Neon NNR25

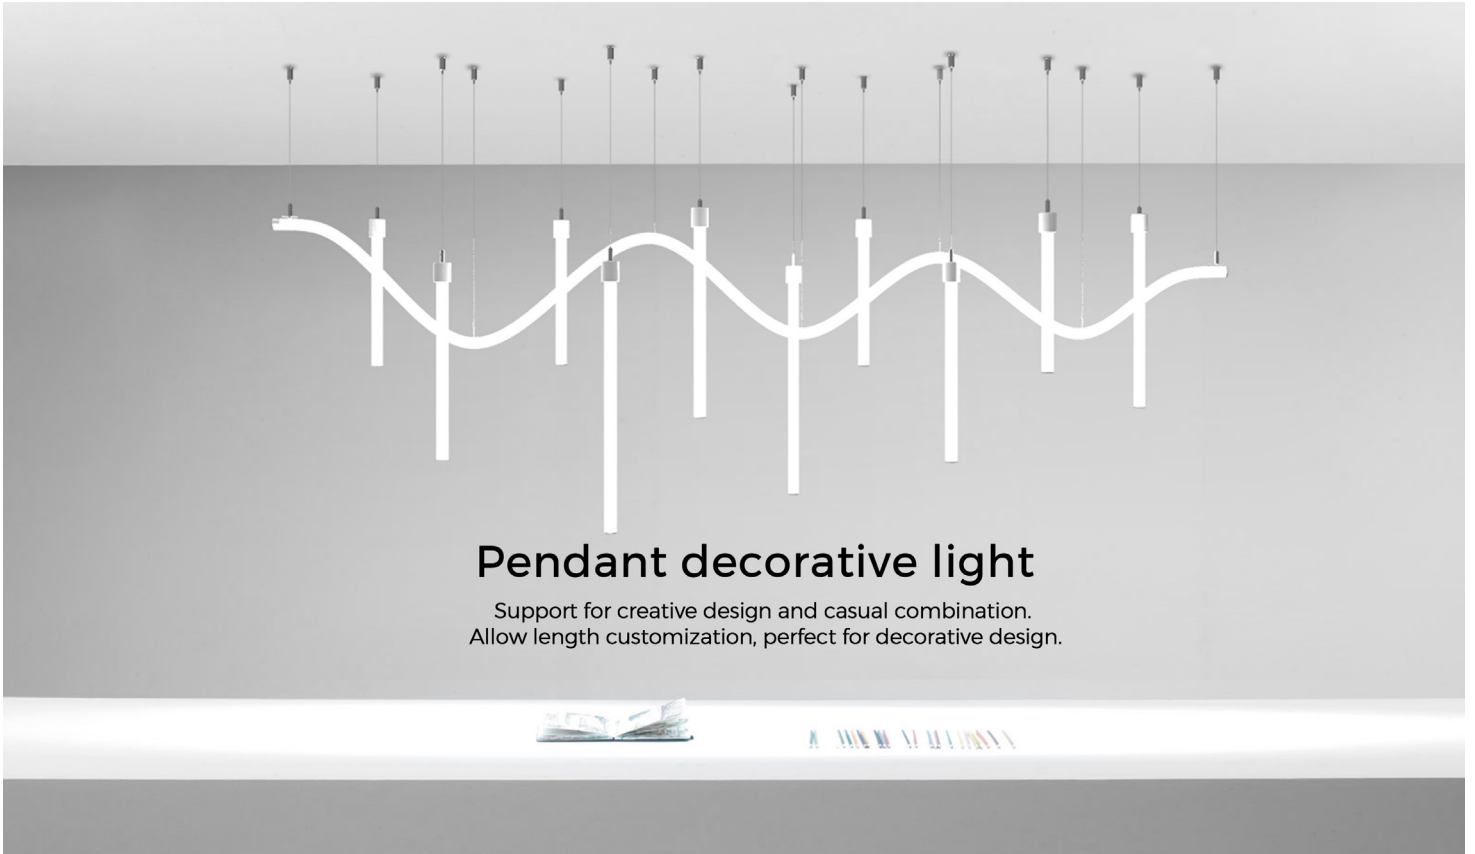


Pendant decorative light

Support for creative design and casual combination.
Allow length customization, perfect for decorative design.

Technique, wire-out method


Silicone extrusion technique,
Available in standard sizes,
Length customization supported.

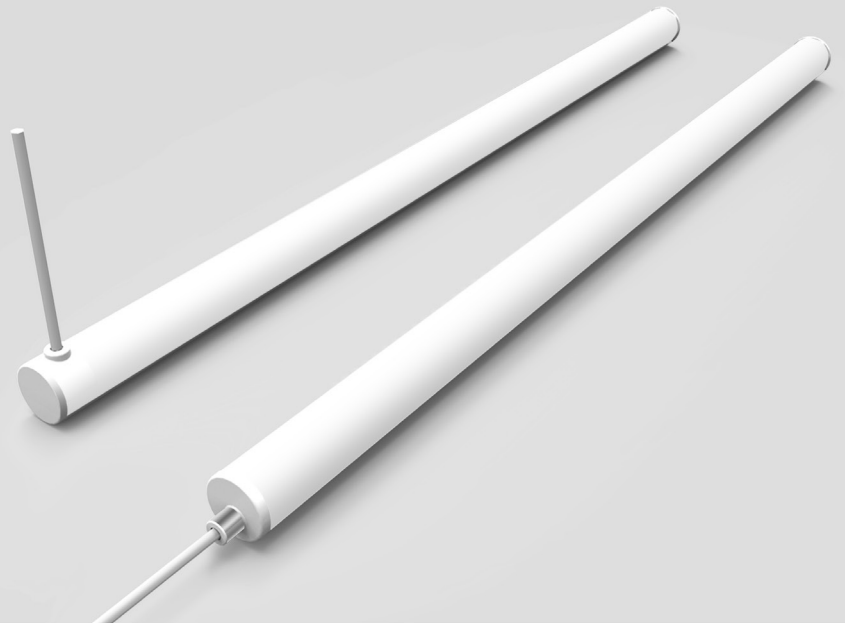


Flex Neon NNR25




Solution

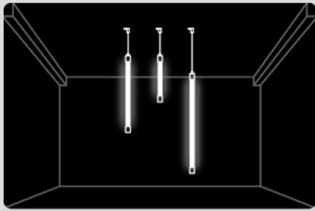


Vertical Lifting

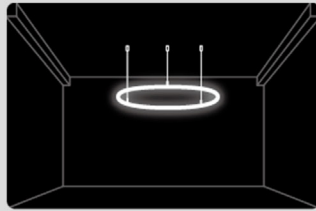


Splicing

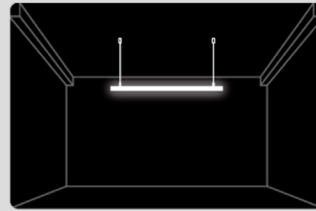


Horizontal lifting

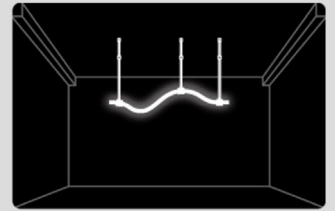


Boom shape

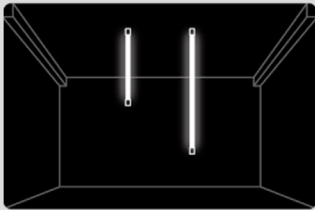


Vertical ceiling-single

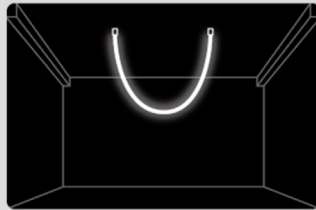

Vertical ceiling-double

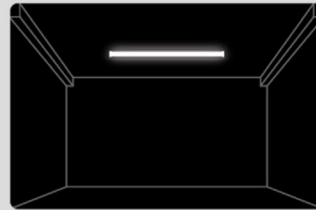

Horizontal ceiling

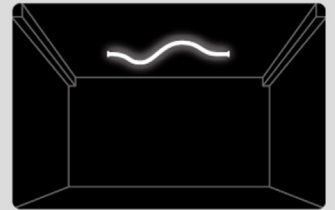

Concealed styling

Application

Suitable for indoor scenario lighting and decorative lighting etc.

